

ALU 80 NEO T-FOLD

Patented

Patented folding door hardware for interior doors and partitions up to 50 kg.

In structural situations where the installation of a sliding door is not possible, the ALU 80 NEO T-FOLD offers the use of a space-saving folding door. It has a smaller opening radius than a normal swinging door. The Softmaster hardware keeps the door closed. New in the T-Fold accessory kit is the stopper, which, if desired, holds the two door elements together in the open position.

- ✓ Allows barrier-free installation of folding doors
- ✓ Flexible division of doors
- ✓ Patented locking and closing door elements
- ✓ Self-cleaning thanks to sloped track design
- ✓ Ceiling mounted at the soffit
- ✓ Pre-assembled components made for easy installation
- ✓ Corrosion-resistant parts





Complete Set



Track T325

Aluminium, pre-drilled,
1000 mm



Hanger

A 310 with fixed screw
A310-M8x35




Rotating threaded flange

20x80mm, M8,
276069



Softmaster V2

207061

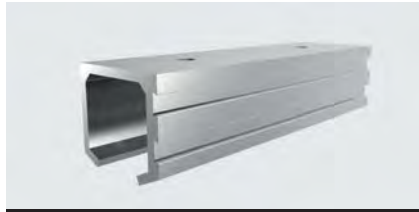

Mounting Track

T 325, 110 mm



Adjustable stopper

115069



Fastening material

Technical Documents

Installation instructions, technical drawings and further information for this product can be downloaded at www.tiger.de. You will also find news and general information about all TIGER products.

Technical Notes

Height	42 ± 5 mm
Max. Door-leaf width	1100 mm
Min. Door thickness	25 mm
Max. Door weight	50 kg

Classification according to DIN EN 1527

Use Category	Durability	Door Weight	Fire Resistance	Safety	Corrosion Resistance	Security	Door Type	Initial Friction
-	6	1	0	-	0	-	2	3

